


RIGGING SCREW/ PIPE TURNBUCKLE SS304 OR SS316


(JAW AND SWAGE TERMINAL)

φ mm	φ1 mm	φ2 mm	A mm	B mm	C mm	ROPE mm	SWL kgs	BL kgs
5.00	5.50	2.80	155.00	80.00	10.00	2.50	150	600
5.00	6.20	3.50	155.00	82.00	6.80	3.20	200	800
6.00	6.35	3.30	176.00	92.00	10.00	3.20	250	1000
6.00	7.40	4.30	174.00	92.00	10.50	4.00	300	1200
8.00	7.50	4.30	190.00	112.00	11.00	4.00	350	1400
10.00	9.00	5.30	237.00	120.00	15.00	5.00	550	2200
12.00	12.58	6.30	288.00	150.00	17.00	6.00	1000	4000
14.00	14.20	7.30	331.00	170.00	15.00	7.00	1350	5400
16.00	16.00	8.30	372.00	190.00	20.00	8.00	1625	6500
20.00	20.00	10.30	459.00	220.00	30.00	10.00	2125	8500

**MINI RIGGING SCREW/ PIPE TURNBUCKLE SS304 OR SS316**


(JAW AND SWAGE TERMINAL),

A mm	B mm	C mm	D mm	E mm	F mm	M mm	ROPE mm
110.50	45.00	7.00	4.90	6.30	3.60	M5	3.20
144.00	61.00	8.50	5.90	7.50	4.40	M6	4.00
155.00	60.00	11.50	7.90	9.00	5.30	M8	5.00
203.00	80.00	14.90	9.90	12.60	6.50	M10	6.00

**RIGGING SCREW SS304 OR SS316**


(SWAGE AND SWAGE)

A mm	B mm	C mm	D mm	E mm	F mm	ROPE mm
188.00	80.80	6.30	3.60	5.00	M5	3.20

**RIGGING SCREW/ PIPE TURNBUCKLE SS304 OR SS316**


(SWIVEL TOGGLE AND JAW)

φ mm	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
6.00	166.00	92.00	8.50	M6	238	950
8.00	200.00	112.00	11.00	M8	450	1800
10.00	236.00	120.00	14.50	M10	625	2500
12.00	285.00	152.00	18.40	M12	925	3700

**RIGGING SCREW/ PIPE TURNBUCKLE SS304 OR SS316**


(WIDE AND WIDE TOGGLE),

φ mm	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
6.00	11.60	92.00	185.00	M6	275	1100
8.00	13.00	112.00	213.00	M8	450	1800
10.00	17.50	121.00	255.00	M10	750	3000
12.00	24.50	150.00	306.00	M12	938	3750

**RIGGING SCREW/ PIPE TURNBUCKLE SS304 OR SS316**


(SWIVEL TOGGLE AND SWAGE TERM)

A mm	B mm	C mm	SWL kgs	BL kgs	ROPE mm
192.00	93.00	M6	238	950	3.20
230.00	111.00	M8	450	1800	4.00
263.00	120.00	M10	625	2500	5.00
330.00	150.00	M12	925	3700	6.00




RIGGING SCREW/ PIPE TURNBUCKLE SS304 OR SS316
(JAW AND JAW)

φ mm	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
4.90	7.50	50.00	115.00	M5	150	600
5.00	10.30	81.00	138.00	M5	189	750
6.00	10.30	92.00	153.00	M6	350	1400
8.00	11.20	112.00	188.00	M8	550	2200
10.00	15.00	121.00	212.00	M10	865	3450
12.00	17.50	150.00	266.00	M12	1250	5000
14.00	15.50	169.00	318.00	M14	1600	6400
16.00	22.00	190.00	355.00	M16	2000	8000
20.00	27.50	223.00	452.00	M20	2625	10500

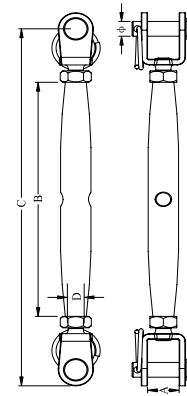


RIGGING SCREW/ PIPE TURNBUCKLE SS304 OR SS316
(EYE AND EYE)

A mm	B mm	C mm	D mm	E mm	F mm	M mm	SWL kgs	BL kgs
63.80	41.50	81.00	5.60	12.00	4.40	M5	188	750
61.50	48.00	92.00	6.50	13.50	4.00	M6	250	1000
80.00	63.60	111.60	8.60	16.60	7.00	M8	550	2200
88.00	69.00	119.00	10.80	20.80	8.80	M10	750	3000
109.50	88.00	150.00	13.00	25.60	10.70	M12	1250	5000
125.50	92.50	170.00	13.00	27.40	9.00	M14	1525	6100
136.00	110.00	190.00	14.50	30.50	14.30	M16	2000	8000
169.00	120.00	220.00	19.50	29.00	15.00	M20	2625	10500




RIGGING SCREW SS304 OR SS316
(LAG AND SWAGE)



A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	WIRE mm
187.00	82.00	4.00	3.50	4.9	M5	4.50	40.30	3.20


TURNBUCKLE, FRAME TYPE SS304 OR SS316
(HOOK AND HOOK)

A mm	B mm	C mm	D mm	SWL kgs	BL kgs
116.00	61.50	9.00	M4	119	475
130.00	71.00	9.50	M5	170	680
167.00	90.50	8.50	M6	375	1500
214.00	122.00	10.30	M8	575	2300
230.00	135.00	12.00	M9	600	2400
265.00	151.50	12.50	M10	775	3100
320.00	201.00	15.00	M12	1100	4400
385.00	244.00	16.00	M16	2025	8100
485.00	295.00	20.00	M20	2750	11000




RIGGING SCREW/ PIPE TURNBUCKLE SS304 OR SS316
(HOOK AND EYE)

A mm	B mm	C mm	SWL kgs	BL kgs
134.00	80.00	M5	33	130
163.00	90.00	M6	88	350
191.00	105.00	M8	163	650
233.00	125.00	M10	200	800
267.00	150.00	M12	350	1400
344.00	190.00	M16	600	2400
444.00	210.00	M20	875	3500




TURNBUCKLE, FRAME TYPE SS304 OR SS316
(EYE AND EYE)

A mm	B mm	C mm	D mm	SWL kgs	BL kgs
103.00	61.50	8.00	M4	118	475
127.50	71.00	10.00	M5	170	680
160.00	90.50	12.00	M6	375	1500
208.00	122.00	14.00	M8	575	2300
225.00	135.00	16.00	M9	600	2400
250.00	151.50	16.00	M10	775	3100
317.00	200.00	18.00	M12	1100	4400
400.00	244.00	26.00	M16	2025	8100
484.00	295.00	29.00	M20	2750	11000




TURNBUCKLE, FRAME TYPE (HOOK AND EYE)
SS304 OR SS316

A mm	B mm	C mm	D mm	E mm	SWL kgs	BL kgs
110.00	61.50	8.00	9.00	M4	118.80	475
127.50	71.00	10.00	9.50	M5	170	680
163.00	90.50	12.00	9.00	M6	375	1500
212.00	122.00	14.00	10.30	M8	575	2300
226.00	135.00	16.00	12.00	M9	600	2400
259.00	151.50	16.00	12.50	M10	775	3100
321.00	201.00	18.00	14.00	M12	1100	4400
397.00	244.00	26.00	16.00	M16	2025	8100
484.00	295.00	29.00	19.00	M20	2750	11000




TURNBUCKLE, FRAME TYPE (JAW AND JAW)
SS304 OR SS316

A mm	B mm	C mm	SWL kgs	BL kgs
130.00	71.00	M5	188	750
152.00	90.50	M6	350	1400
192.00	121.50	M8	550	2200
243.00	151.50	M10	863	3450
316.00	200.00	M12	1250	5000
376.00	225.00	M14	1600	6400
412.00	244.00	M16	2000	8000
525.00	295.00	M20	2625	10500

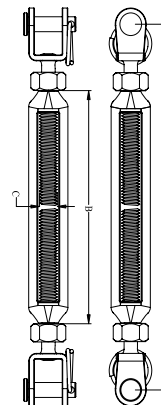


TOGGLE TERMINAL WITH NUT
SS304 OR SS316

φ mm	A mm	B mm	C mm	D mm
9.70	113.00	25.00	17.00	M12
9.70	126.00	40.00	16.90	M12




SWAGE TOGGLE
SS304 OR SS316

A mm	B mm	C mm	D mm	E mm	SWL kgs	BL kgs
5.60	3.80	5.50	4.90	35.00	250	1000
7.50	5.00	6.60	5.90	41.00	312	1250
9.90	6.00	9.00	7.90	49.70	425	1700
12.00	6.70	10.00	8.90	54.90	775	3100
13.00	9.00	13.10	11.90	77.70	1162	4650
14.70	10.00	15.00	14.00	91.30	1437	5700
16.60	12.20	16.60	15.70	115.90	2037	8100




STUD TERMINAL SS304 OR SS316

*Supplied with 8mm A/F nuts

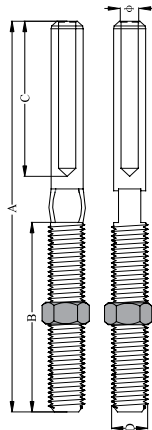


φ mm	A mm	B mm	C mm	D mm
2.70	86.00	40.00	35.00	M5
3.50	75.0	30.0	35.0	M5(LEFT)
3.50	75.0	30.0	35.0	M5
3.50	75.0	30.0	35.0	M6(LEFT)
3.50	75.0	30.0	35.0	M6
3.20	90.00	40.00	40.00	M5
3.20	90.00	40.00	40.00	M5(LEFT)
3.30	97.00	48.00	38.00	M6
3.20	97.00	48.00	40.00	M6(LEFT)
4.00	109.00	49.00	48.00	M6
4.00	100.00	48.00	40.00	M6(LEFT)
4.30	115.00	54.00	45.00	M8
5.30	128.00	61.00	52.00	M10
6.30	130.00	63.00	52.00	M10
6.30	162.00	79.00	63.00	M12
7.30	178.00	90.00	70.00	M14
8.30	214.00	102.00	80.00	M16
10.50	215.00	105.00	90.00	M20
12.50	260.00	120.00	120.00	M20
14.80	300.00	140.00	140.00	M20
17.00	355.00	170.00	160.00	M24
21.00	425.00	180.00	200.00	M30

STUD TERMINAL SS304 OR SS316 (ONE SIDE INTER THREAD)




A mm	B mm	C mm	D mm	E mm	F mm	G mm	M mm
46.00	38.00	88.00	3.40	6.30	8.00	35.00	M5
50.00	45.00	95.00	4.40	7.50	8.00	35.00	M6
46.00	38.00	88.00	3.60	6.30	8.00	35.00	M5

ROD TERMINAL (DOME) SS304 OR SS316




A mm	B mm	C mm	D mm	E mm	F mm
3.30	6.30	10.00	35.00	25.00	32.00
3.30	5.50	8.00	35.00	25.00	32.00
4.30	6.30	10.00	35.00	25.00	32.00
5.30	7.50	11.50	41.00	30.00	38.00
6.30	9.08	14.00	52.00	40.00	48.50
8.40	12.50	18.00	66.00	50.00	62.00
10.50	16.08	22.00	77.00	60.00	73.00

COUNTER-SUNK ROD TERMINAL SS304 OR SS316




A mm	B mm	C mm	D mm	E mm	F mm
3.30	5.50	8.00	35.00	25.00	32.50
4.30	6.30	10.00	35.00	25.00	32.00
5.30	7.50	11.50	41.00	30.00	38.00
6.30	9.08	14.00	52.00	40.00	48.50
8.40	12.50	18.00	66.00	50.00	62.00
10.50	16.08	22.00	77.00	60.00	73.00

TOGGLE TERMINAL SS304 OR SS316




A mm	B mm	C mm	D mm	SWL kgs	BL kgs	ROPE mm
68.00	5.50	4.90	2.70	100	400	2.50
79.00	6.30	5.90	3.30	167	670	3.20
91.30	7.50	7.90	4.30	350	1400	4.00
107.80	9.00	9.80	5.30	425	1700	5.00
128.00	12.50	11.80	6.30	1000	4000	6.00
180.00	16.00	15.50	8.30	1750	7000	8.00
205.00	17.80	19.40	10.50	1875	7500	10.00

FORK TERMINAL FORGED SS304 OR SS316




Φ 1 mm	Φ 2 mm	Φ 3 mm	A mm	B mm	C mm	SWL kgs	BL kgs	ROPE mm
2.70	5.45	5.00	6.50	55.00	24.00	175	700	2.5
3.50	6.35	6.00	8.20	65.00	32.00	313	1250	3.2
3.40	6.24	5.00	7.50	50.00	25.00	300	1200	3.2
3.50	6.35	5.00	7.00	65.00	32.00	313	1250	3.2
4.30	7.50	8.00	9.20	73.00	45.00	450	1800	4.0
4.40	7.50	6.00	8.20	73.00	45.00	450	1800	4.0
5.30	9.00	10.00	12.00	88.00	57.00	663	2650	5.0
6.40	12.50	12.00	14.00	106.00	63.00	1000	4000	6.0
8.80	16.00	13.00	17.50	155.00	95.00	1450	5800	8.0
10.80	18.00	16.00	21.00	177.00	110.00	1800	7200	10.0

EYE BOLT/ SCREW SS304 OR SS316




A mm	B mm	C mm	D mm	E mm	F mm
28.00	10.00	7.00	14.00	6.20	M6
26.00	10.00	6.70	12.70	5.90	M6
43.00	26.00	6.70	12.70	6.00	M6

DOUBLE THREAD LAG SCREW SS304 OR SS316



A mm	B mm	C mm	D mm
50.00	11.00	36.00	M8
60.00	20.00	37.00	M8
81.00	30.00	35.00	M8
98.80	40.00	47.00	M8
50.00	15.00	37.00	M10
60.00	20.00	37.00	M10
84.50	20.00	47.00	M10
102.00	30.00	55.00	M10


EYE TERMINAL FORGED SS304 OR SS316



Φ 1 mm	Φ 2 mm	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
5.50	2.70	5.50	57.50	35.00	2.60	213	850
6.30	3.30	6.50	62.30	38.70	3.80	250	1000
7.50	4.30	8.50	77.00	45.00	4.90	338	1350
9.00	5.30	10.60	89.00	53.80	5.80	625	2500
12.50	6.30	13.00	106.70	63.00	7.80	1125	4500
16.00	8.30	14.70	135.00	81.80	9.90	1675	6700
17.80	10.50	16.20	158.00	90.00	10.80	1950	7800
21.40	12.50	19.50	180.00	102.70	15.00	2250	9000
25.00	14.80	23.50	233.00	140.00	19.40	3000	12000


LAG SCREW/SWAGE TERMINAL LEFT OR RIGHT THREAD SS304 OR SS316

* Thread, right/left




Φ mm	A mm	D mm	L mm	L1 mm	L2 mm	K mm	H mm	T*	ROPE mm
5*2.20	2.70	5.50	86.00	40.00	35.00	4.00	8.00	R	2.50
6*2.60	3.30	6.30	97.00	48.00	38.00	5.00	8.00	R	3.20
8*3.50	4.30	7.50	115.00	54.00	45.00	6.00	10.00	R	4.00
10*4.50	5.30	9.00	128.00	61.00	52.00	7.00	10.00	R	5.00
12*5.00	6.30	12.50	162.00	79.00	63.00	10.00	10.00	R	6.00
6*2.60	3.30	6.30	97.00	48.00	38.00	5.00	8.00	L	3.20
8*3.50	4.30	7.50	115.00	54.00	45.00	6.00	10.00	L	4.00
6*2.60	3.30	6.30	91.00	42.00	38.00	5.00	8.00	R	3.20
6*2.60	3.30	6.30	91.00	42.00	38.00	5.00	8.00	L	3.20

EYE LAG SCREW SS304 OR SS316




ϕ mm	A mm	B mm	C mm
6.00	40.00	24.00	14.00
6.00	60.00	36.00	14.00
6.00	80.00	48.00	14.00
6.00	100.00	60.00	14.00
8.00	62.00	36.00	18.40
8.00	81.00	48.00	18.40
8.00	102.00	60.00	18.00
10.00	63.00	36.00	22.20
10.00	83.00	48.00	23.00
10.00	98.00	60.00	22.00
10.00	120.00	70.00	22.00
12.00	80.00	48.00	27.00
12.00	106.00	60.00	27.00
12.00	122.50	72.00	27.30
12.00	140.00	84.00	27.00
12.00	160.00	96.00	27.00

LAG EYE SCREW SS304 OR SS316




ϕ mm	A mm	B mm
5.76	100.00	14.00
7.80	109.00	20.00
9.25	124.00	30.00
5.76	62.00	16.00
7.80	84.50	20.00

LAG EYE SCREW FORGED SS304 OR SS316




ϕ mm	A mm	B mm	C mm	D mm	L mm
4.0	4.30	4.60	30.00	3.80	45.00
5.6~6	6.30	7.00	30.00	6.00	40.00
5.6~6	6.30	7.00	35.00	6.00	50.00
5.6~6	6.30	7.00	40.00	6.00	55.00
5.6~6	6.30	7.00	40.00	6.00	60.00
6.00	6.50	6.00	44.00	6.00	55.00
7.6~8	8.40	9.00	40.00	8.00	60.00
7.6~8	8.40	9.00	50.00	8.00	75.00
7.6~8	8.40	9.00	55.00	8.00	80.00
7.6~8	8.40	9.00	65.00	8.00	100.00
9.6~10	10.20	11.00	50.00	10.00	75.00
9.6~10	10.20	11.00	55.00	10.00	80.00
9.6~10	10.20	11.00	60.00	10.00	85.00
9.6~10	10.20	11.00	65.00	10.00	100.00
9.6~10	10.20	11.00	80.00	10.00	120.00
11.6~12	12.10	13.00	65.00	12.00	100.00
11.6~12	12.10	13.00	80.00	12.00	120.00

LIFTING EYE BOLT WITH WASHER AND NUT SS304 OR SS316




A mm	B mm	C mm	D mm	SWL kgs	BL kgs
M6	16.20	39.50	71.00	275	1100
M6	16.20	60.00	91.60	275	1100
M6	16.40	80.00	111.00	275	1100
M8	20.60	80.00	118.30	325	1300
M8	20.60	100.00	140.00	325	1300
M10	25.60	100.00	148.80	650	2600
M10	25.80	120.00	170.00	650	2600
M12	30.20	100.00	160.00	850	3400
M12	30.20	120.00	180.00	850	3400
M12	30.20	150.00	200.00	850	3400

RING NAIL SS304 OR SS316




A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm
25.00	47.60	33.00	6.00	4.80	2.90	2.90	9.90
30.00	47.50	32.00	6.50	4.80	2.90	3.90	10.00
35.00	59.00	34.50	8.50	6.50	4.00	5.00	13.80
40.00	58.80	37.00	13.50	8.40	4.80	5.80	15.80
45.00	64.50	39.00	10.50	10.30	6.00	7.80	19.80

**EYE BOLT
WITH DOUBLE WASHERS AND NUT
SS304 OR SS316**




A mm	B mm	C mm	SWL kgs	BL kgs
M6	13.00	40.00	250	1000
M6	13.00	60.00	250	1000
M6	13.00	80.00	250	1000
M6	13.00	100.00	250	1000
M8	17.00	60.00	450	1800
M8	17.00	80.00	450	1800
M8	17.00	100.00	600	2400
M8	17.00	130.00	450	1800
M10	21.00	60.00	600	2400
M10	21.00	80.00	600	2400
M10	21.00	100.00	875	3500
M10	21.00	120.00	600	2400
M10	21.00	150.00	600	2400
M12	25.00	80.00	875	3500
M12	25.00	100.00	875	3500
M12	25.00	120.00	875	3500
M12	25.00	150.00	875	3500

**FORGED EYE BOLT WITH WASHER
& NUT SS304 OR SS316**




A mm	B mm	C mm	D mm	E mm	F mm
67.80	37.00	7.20	13.80	6.00	M6

**WIRE ROPE CLIP
SS304 OR SS316**




A mm	B mm	C mm	D mm	E mm
18.00	15.30	13.00	M3	2.0
24.50	15.80	14.50	M4	3.0
24.00	18.50	18.00	M4	4.0
29.00	23.00	19.60	M5	5.0
31.00	26.30	20.50	M6	6.0
41.00	33.50	27.00	M8	8.0
52.00	42.70	33.80	M10	10.0
61.00	50.00	37.80	M12	12.0
67.50	50.60	42.00	M12	14.0
76.00	60.00	47.00	M14	16.0
79.00	61.50	51.00	M14	19.0
103.00	72.80	61.00	M16	22.0
110.00	72.50	60.00	M16	25.0

**WIRE ROPE CLIP
(LIGHT TYPE)
SS304 OR SS316**




A mm	B mm	C mm	D mm	E mm
21.30	10.00	17.00	M3	2.0
21.20	10.00	17.70	M3	3.0
24.00	11.00	21.30	M4	4.0
28.50	12.70	24.60	M6	5.0
31.80	15.80	27.50	M6	6.0
37.00	17.50	30.50	M6	8.0
45.80	19.50	37.00	M8	10.0
56.40	24.00	45.80	M10	13.0
66.80	25.00	49.80	M12	16.0
77.50	29.50	53.80	M12	19.0
86.50	31.30	63.00	M12	22.0

**SADDLE/ EYE STRAP
SS304 OR SS316**




φ mm	A mm	B mm	C mm
4.00	3.20	15.80	32.00
5.00	4.30	18.00	40.00
6.00	5.30	22.00	44.00
8.00	5.20	23.00	51.00
10.00	8.40	27.80	62.00

**SADDLE/ FLAT EYE STRAP
(TWO HOLE TYPE)
SS304 OR SS316**




φ mm	A mm	B mm	C mm
4.00	42.50	10.00	11.00
4.00	46.50	14.50	11.00
4.20	48.50	17.00	11.00

**THIMBLE
SS304 OR SS316**



A mm	B mm	C mm	D mm	E mm	WIRE mm
7.50	18.00	20.60	4.50	3.00	2.0
10.00	21.00	24.30	6.00	4.30	3.0
11.00	24.80	27.80	6.60	5.20	4.0
13.00	26.00	30.50	8.50	6.80	5.0
15.50	32.60	37.00	10.00	8.80	6.0
23.00	45.50	51.50	12.50	10.00	8.0
27.00	50.00	56.40	14.60	12.00	10.0
32.50	61.00	68.00	18.00	14.50	12.0
30.60	60.00	68.70	19.50	15.50	14.0
37.50	75.00	82.70	22.00	19.00	16.0
38.00	71.00	80.60	23.00	19.50	18.0
45.50	93.50	104.80	27.80	24.00	20.0
45.50	98.00	112.00	29.60	25.70	22.0
52.00	110.00	124.50	34.00	29.50	24.0

**THIMBLE
CAST WITH CLOSED END
SS304 OR SS316**




A mm	B mm	C mm	D mm	WIRE mm
10.50	5.70	25.00	3.00	2.0
14.00	7.00	32.00	3.60	3.0
17.00	9.00	42.50	8.00	6.0
24.50	12.80	58.00	8.80	8.0
28.30	13.60	67.50	10.30	10.0
36.50	16.30	85.50	12.00	12.0
46.80	22.30	109.50	15.00	14.0

**THIMBLE SHEET
CAST WITH CLOSED END
SS304 OR SS316**




A mm	B mm	C mm	D mm	E mm
36.00	6.90	8.30	3.60	14.50
47.00	10.70	10.00	4.20	18.90
53.00	13.50	11.00	4.40	26.80
60.50	14.70	13.30	5.20	27.70
72.00	19.20	15.50	6.90	34.00

**WIRE ROPE THIMBLE
SS304 OR SS316**




A mm	B mm	C mm	D mm
80.00	12.70	21.00	10.50
100.00	15.00	23.50	14.00
118.00	21.00	28.00	16.00
147.00	27.00	36.00	20.00
182.00	33.00	47.00	19.00

CABLE PIVOT SS304 OR SS316




φ A mm	B mm	C mm	D mm
13.00	6.10	10.70	2.00
13.00	8.20	10.70	2.00

HEX SOCKET TENSIONER SS304 OR SS316



A mm	B mm	C mm	D mm	H mm	I mm	M mm
42.50	2.00	8.00	12.50	5.00	30.00	M5
42.50	2.00	8.00	12.50	5.00	30.00	M6

COUNTER SUNK HEX SOCKET TIMBER INSERT SS316



A mm	B mm	C mm	D mm	THREAD
M6	10.0	30.0	12.5	RIGHT
M6	10.0	30.0	12.5	LEFT

**STAINLESS STEEL WIRE SS316
SOLD IN REELS ONLY**

- Suitable for marine and premium industrial applications
- Manufactured in Korea from high quality POSCO stainless steel rods
- Highly polished finish



(7x19)



(7x7)



(1x19)



Size mm	M/Reel	Breaking Strength (min) Kgs
M1.6 (1x19)	305	214
M2.0 (1x19)	305	335
M2.5 (1x19)	305	525
M3.2 (1x19)	305	849
M3.2 (1x19)	1000	849
M4.0 (1x19)	305	1339
M5.0 (1x19)	305	2098
M6.0 (1x19)	305	2876
M2.0 (7x19)	305	250
M2.5 (7x19)	305	389
M3.2 (7x19)	305	612
M4.0 (7x19)	305	959
M5.0 (7x19)	305	1489
M6.0 (7x19)	305	2149
M10.0 (7x19)	305	5966
M1.6 (7x7)	305	168
M2.0 (7x7)	305	260
M2.5 (7x7)	305	399
M3.2 (7x7)	305	665
M3.2 (7x7)	1000	665
M4.0 (7x7)	305	1039
M5.0 (7x7)	305	1619
M6.0 (7x7)	305	2328

**STAINLESS STEEL WIRE SS316
SOLD IN REELS ONLY**

- Economical industrial applications
- Grade 304 is available upon request only

Size mm	M/Reel	Breaking Strength (min) Kgs
M1.6 (1x19)	305	215
M1.6 (1x19)	1000	215
M2.0 (1x19)	305	335
M2.5 (1x19)	305	525
M3.2 (1x19)	305	860
M4.0 (1x19)	305	1345
M5.0 (1x19)	305	2100
M6.0 (1x19)	305	3025
M8.0 (1x19)	305	5380
M10.0 (1x19)	305	8030
M2.0 (7x19)	305	210
M2.5 (7x19)	305	330
M3.2 (7x19)	305	540
M4.0 (7x19)	305	850
M5.0 (7x19)	305	1330
M6.0 (7x19)	305	1910
M8.0 (7x19)	305	3400
M10.0 (7x19)	305	5310
M1.6 (7x7)	305	145
M2.0 (7x7)	305	230
M2.5 (7x7)	305	350
M3.2 (7x7)	305	580
M4.0 (7x7)	305	920
M5.0 (7x7)	305	1430
M6.0 (7x7)	305	2070
M8.0 (7x7)	305	3680
M10.0 (7x7)	305	5750

NICKEL PLATED HAND COPPER SWAGE



WIRE SIZE mm	WIRE SIZE inch	A mm
1.60	1/16"	10.50
2.00	5/64"	10.50
2.40	3/32"	11.00
3.20	1/8"	14.00
4.00	5/32"	17.00
4.80	3/16"	21.00
6.40	1/4"	25.00

RETAINING CLIP FOR FORK TERMINALS SS316



TERMINAL/SCREW SIZE mm
M5
M6

CLEVIS PIN FOR FORK TERMINALS SS316



TERMINAL/SCREW SIZE mm
M5
M6

NYLON GROMMETS (SPLIT TYPE)



SUIT WIRE ROPE mm	COLOUR	POST DRILL SIZE inch
3.2-5.0	BLACK	11/32"
3.2-5.0	GREY	11/32"