


A.SHORT LINK CHAIN (DIN 766)

P mm	B mm	Wgt. KG/M	Breaking Strain
22.00	8.00	0.16	150 Kg
16.00	11.00	0.16	800 Kg
16.00	14.00	0.32	1350 Kg
18.50	17.00	0.50	1970 Kg
18.50	20.00	0.75	2880 Kg
24.00	26.00	1.35	5100 Kg
28.00	34.00	2.25	7900 Kg

* M2 IS DIN 763

B.MEDIUM LINK CHAIN

P mm	B mm	Wgt. KG/M	Breaking Strain
12.00	8.00	0.10	280 Kg
16.00	12.00	0.16	450 Kg
19.00	16.00	0.30	800 Kg
21.00	20.00	0.45	1200 Kg
24.00	24.00	0.70	1800 Kg
32.00	32.00	1.30	3200 Kg
40.00	40.00	2.00	5000 Kg
48.00	48.00	2.90	7200 Kg

**SPRING HOOK
SS304 OR SS316**

ϕ mm	A mm	B mm	C mm	SWL kgs	BL kgs
6.00	60.00	34.50	12.50	188	750
8.00	80.00	46.00	17.00	438	1750
10.00	100.00	55.00	23.50	563	2250
12.00	122.50	72.00	28.00	913	3650


**SPRING HOOK CAST
SS304 OR SS316**

ϕ mm	A mm	B mm	C mm
6.00	60.00	34.50	12.50
8.00	80.00	46.00	17.00
14.00	143.00	85.50	20.00
16.00	165.00	98.00	25.00


**SPRING HOOK
SS304 OR SS316**

ϕ mm	A mm	B mm	C mm	SWL kgs	BL kgs
6.00	60.00	30.00	8.00	68	272
8.00	80.00	40.00	11.50	127	508
10.00	100.00	50.00	13.50	182	728
11.00	120.00	60.00	16.00	204	816




**SPRING HOOK
SS304 OR SS316****SPRING HOOK WITH EYE
SS304 OR SS316**

φ mm	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
4.50	42.00	20.50	6.00	6.50	45	180
5.00	50.00	26.50	7.00	8.00	55	220
6.00	60.00	30.00	7.50	8.50	68	272
7.00	70.00	35.00	9.00	9.50	91	364
8.00	80.00	40.50	10.00	12.00	127	508
9.00	90.00	45.00	10.50	12.80	150	600
10.00	100.00	50.00	12.00	15.00	182	728
11.00	120.00	58.00	16.00	19.00	204	816
12.00	140.00	64.00	21.00	22.00	227	908
13.00	160.00	72.00	24.00	22.00	250	1000

**SPRING HOOK WITH LOCKING NUT
SS304 OR SS316****SPRING HOOK WITH LOCKING NUT AND EYE
SS304 OR SS316**

φ mm	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
6.00	60.00	30.00	6.50	8.50	114	456
7.00	70.00	35.00	7.50	9.50	145	580
8.00	80.00	40.50	8.50	12.00	182	728
9.00	90.00	45.00	9.00	12.80	225	900
10.00	100.00	50.00	10.00	15.00	273	1092
11.00	120.00	58.00	14.50	19.00	315	1260
12.00	140.00	64.00	19.00	22.00	365	1460

**LOCK SPRING HOOK
SAFETY LATCH
SS304 OR SS316****LOCK SPRING HOOK WITH EYE SAFETY LATCH
SS304 OR SS316**

φ mm	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
5.00	50.00	26.50	7.00	8.00	55	220
6.00	60.00	30.00	7.50	8.50	68	272
7.00	70.00	35.00	9.00	9.50	91	364
8.00	80.00	40.50	10.00	12.00	127	508
9.00	90.00	45.00	10.50	12.80	150	600
10.00	100.00	50.00	12.00	15.00	182	728
11.00	120.00	58.00	16.00	19.00	204	816
12.00	140.00	64.00	21.00	22.00	227	908
13.00	160.00	72.00	24.00	22.00	250	1000

**SNAP S-HOOK
SS304 OR SS316**

φ mm	A mm	B mm	C mm	D mm
5.00	57.80	10.30	9.00	4.00
6.00	64.00	9.70	8.00	3.00
8.00	74.00	16.30	15.00	4.00
9.00	86.00	18.00	18.00	8.50
10.00	95.00	20.00	18.00	8.50

**S-HOOK (OPEN END AND NARROW END)
SS304 OR SS316**


φ mm	A mm	B mm	C mm	D mm
5.00	51.00	10.30	10.80	3.50
6.00	64.50	11.00	12.00	5.00
8.00	75.00	16.00	17.00	4.50
9.00	84.00	18.00	19.00	7.60
9.50	95.00	20.80	21.00	8.80

**S-HOOK
SS304 OR SS316**

φ mm	A mm	B1 mm	B2 mm	R1 mm	R2 mm
3.00	36.00	7.50	14.00	4.50	8.00
4.00	44.00	10.50	14.50	6.00	9.50
5.00	53.00	12.50	16.00	7.00	10.50
6.00	62.00	12.50	18.00	7.50	12.50
8.00	83.00	14.00	23.00	10.00	16.50
10.00	105.00	17.50	34.00	12.50	20.50

**SPRING FENDER HOOK
SS304 OR SS316**

A mm	B mm	C mm	D mm	E mm	F mm
32.80	11.20	36.00	6.60	4.00	22.00
30.40	10.60	44.00	11.00	4.00	22.00


**FENDER EYE
SS304 OR SS316**

A mm	B mm	C mm
27.00	17.00	18.00

**FENDER HOOK
SS304 OR SS316**

φ mm	A mm	B mm	C mm	D mm
2.80	25.80	24.40	20.00	16.60



**DECK HOOK (TYPE-EL)
SS304 OR SS316**

A mm	B mm	C mm	D mm	E mm
16.50	13.00	5.90	40.00	17.00

**DECK HOOK (TYPE-33)
SS304 OR SS316**


A mm	B mm	C mm
17.60	5.00	10.00

**DECK HOOK
(TYPE-40)
SS304 OR SS316**


A mm	B mm	C mm	D mm	E mm
38.20	30.80	4.70	10.00	5.20

**DECK HOOK
(TYPE-43)
SS304 OR SS316**

A mm	B mm	C mm	D mm
6.20	31.00	10.20	3.60

**DECK HOOK (TYPE-45)
SS304 OR SS316**

φ mm	A mm	B mm
7.40	40.80	21.00

**DECK HOOK (TYPE-46)
SS304 OR SS316**


A mm	B mm	C mm
22.00	5.90	40.00

**DECK HOOK (TYPE-47)
SS304 OR SS316**

φ mm	A mm	B mm
8.60	25.90	21.00

**DECK HOOK (TYPE-60)
SS304 OR SS316**


φ mm	A mm	B mm
9.80	60.00	55.00

**DECK HOOK (TYPE-G)
SS304 OR SS316**

A mm	B mm	C mm
12.00	47.00	35.60


**DECK HOOK (TYPE-H)
SS304 OR SS316**

φ mm	A mm	B mm
9.00	6.70	30.00

**DECK HOOK (TYPE-63)
SS304 OR SS316**


φ mm	A mm	B mm	C mm	D mm
8.00	43.30	37.30	22.00	4.00

DECK HOOK (TYPE-G)
SS304 OR SS316




A mm	B mm	C mm
12.00	47.00	35.60

**DECK HOOK
(TYPE-H)**
SS304 OR SS316




φ mm	A mm	B mm
9.00	6.70	30.00

DECK HOOK (TYPE-63)
SS304 OR SS316



φ mm	A mm	B mm	C mm	D mm
8.00	43.30	37.30	22.00	4.00

**ROPE SHEET
SNAP SHACKLE**
SS304 OR SS316



A mm	B mm	C mm
15.00	11.00	50.00
17.00	14.00	63.70
26.00	22.00	95.00

**PELICAN HOOK
(WITH LINK)**
SS304 OR SS316



SIZE inch	A mm	D mm	L mm
4"	10.00	18.00	98.50
6"	13.00	22.00	148.00

PELICAN HOOK
SS304 OR SS316



A mm	B mm	C mm	SWL kgs	BL kgs
72.60	11.00	M6	300	1200
97.00	14.00	M8	375	1500
144.80	23.00	M10	875	3500
145.60	23.00	M12	875	3500

**SPRING SNAP CAST,
EYE END**
SS304 OR SS316




A mm	B mm	C mm	SWL kgs	BL kgs
25.00	49.50	8.00	55	220
31.00	68.80	12.50	125	500
47.00	97.00	20.00	225	900

**SPRING SNAP-CAST
(HOOK END)**
SS304 OR SS316



A mm	B mm	C mm	SWL kgs	BL kgs
25.00	9.00	49.00	60	250
29.00	8.00	52.80	75	300
32.20	7.80	60.60	80	320
34.50	8.30	65.00	85	350
48.00	10.80	89.00	175	700

**GRAB HOOK CLEVIS END
SS304 OR SS316**

ϕ mm	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
9.00	44.00	78.00	8.80	11.00	525	2100
11.00	54.50	94.50	10.80	13.00	775	3100
12.00	64.00	106.60	12.30	18.00	1000	4000
16.00	87.00	142.00	16.00	19.00	1838	7350

**SLIP HOOK CLEVIS END
SS304 OR SS316**


ϕ mm	A mm	B mm	C mm	D mm	E mm	F mm	SWL kgs	BL kgs
9.00	60.50	98.80	26.00	22.00	26.00	11.00	500	2000
11.00	72.00	110.00	31.50	23.35	31.30	13.00	750	3000
12.00	88.00	129.00	34.00	29.00	36.00	14.80	1000	4000
16.00	112.00	164.00	45.00	36.00	45.80	18.60	1400	5600

**SLIP HOOK (SWIVEL END WITH SAFETY LATCH)
SS304 OR SS316**


A mm	B mm	C mm	D mm	E mm	SWL kgs	BL kgs
22.00	22.50	6.50	21.50	117.00	425	1700
28.60	30.00	8.00	25.50	146.00	750	3000
28.00	27.50	9.30	28.80	158.00	1150	4600
35.50	34.50	12.70	36.30	201.00	1900	7600

**SLIP HOOK (EYE END WITH SAFETY LATCH)
SS304 OR SS316**


A mm	D mm	L mm	SWL kgs	BL kgs
22.00	13.30	88.30	425	1700
24.50	16.00	107.00	595	2380
26.80	18.00	123.00	850	3400

**HOOK ANCHOR
SS304 OR SS316**


A mm	B mm	C mm	D mm	E mm	F mm
31.00	160.00	6.00	36.00	12.80	207.00
45.00	222.00	8.00	45.00	15.80	246.00

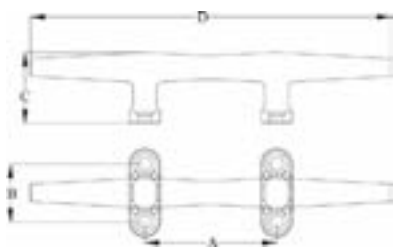**LOW FLAT CLEAT
SS304 OR SS316**


A mm	B mm	C mm	D mm
37.80	22.50	23.00	97.50
47.50	24.50	25.80	121.50
54.00	27.00	30.50	155.00
69.00	33.00	37.00	200.00
89.00	46.00	47.00	246.00
91.00	46.00	54.50	295.00

**TRIM LINE CLEAT
SS304 OR SS316**


φ mm	A mm	B mm	C mm
6.20	34.50	20.80	96.80
6.00	45.00	24.00	121.00
6.00	52.00	27.50	145.00
8.00	61.30	31.00	195.00
8.00	73.30	40.00	243.00
8.00	82.00	45.50	292.00

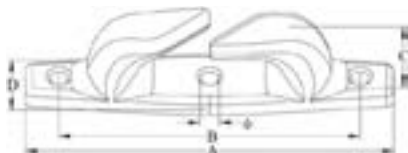**SKENE CHOCKS
SS304 OR SS316**

φ mm	A mm	B mm	C mm	D mm
5.00	116.00	97.50	25.60	23.00
5.00	116.00	97.50	25.60	23.00
6.00	153.50	124.50	29.50	34.50
6.00	153.60	124.50	29.50	34.50

**BLUE WATER CLEAT
SS304 OR SS316**


A mm	B mm	C mm	D mm	E mm
23.50	8.70	100.00	4.50	30.00
30.00	10.50	124.00	5.50	40.00
32.50	12.00	149.00	6.50	45.00
42.00	15.60	200.00	8.50	55.00
49.90	15.80	250.00	8.30	71.00
65.00	14.00	297.00	8.00	90.00

**ROPE CLEAT
SS304 OR SS316**

φ mm	A mm	B mm
4.00	10.00	68.00
5.90	20.50	114.00
6.70	23.00	150.00

HANDLE SS304 OR SS316


A mm	B mm	C mm	D mm	E mm	F mm	G mm
150.00	33.60	3.60	12.50	16.70	6.90	10.00

SKI TOW EYES STAINLESS STEEL SS304 OR SS316

φ 1 mm	φ 2 mm	φ 3 mm	A mm	B mm	C mm	D mm	E mm	F mm
62.80	31.80	9.50	3/8-16UNC	54.00	39.00	67.90	49.00	45°

PUMP FILTER SS304 OR SS316


1 mm	2 mm	A mm	B mm
24.50	35.50	103.00	50.00
32.00	44.00	130.50	68.00
34.50	51.00	137.00	70.50
47.00	62.50	166.00	86.00

**WIRE ROPE SHEAVE
SS304 OR SS316**


A mm	B mm	C mm	D mm
26.80	17.30	11.00	8.00
31.00	16.50	11.50	8.00
50.00	19.00	14.00	10.00
75.50	19.40	14.50	13.00
75.50	28.50	21.80	13.00
100.80	24.90	17.40	17.00
100.80	33.00	26.80	17.00
127.00	25.50	19.20	17.00

**PULLEY BLOCK- TYPE B
(PIN RIVET) NYLON SHEAVE
SS304 OR SS316**

A mm	B mm	C mm	D mm
9.60	20.00	45.20	1.20

**PULLEY BLOCK- TYPE C
(REMOVABLE PIN WITH RIVET) NYLON SHEAVE,
SS304 OR SS316**


φ mm	A mm	B mm	C mm
4.90	7.00	9.00	45.00

**PULLEY BLOCK- TYPE D
(WITH BRACKET AND PIN RIVET) NYLON SHEAVE,
SS304 OR SS316**


φ mm	A mm	B mm	C mm	D mm
5.00	6.80	9.00	6.80	10.00

**PULLEY BLOCK- TYPE A
(PIN RIVET) NYLON SHEAVE
SS304 OR SS316**

A mm	B mm	C mm	D mm
6.70	9.00	43.50	10.00


**PULLEY BLOCK- TYPE F
(WITH PIN RIVET AND BRACKET) NYLON SHEAVE,
SS304 OR SS316**

A mm	B mm	C mm	D mm	E mm
8.80	10.30	1.20	59.30	25.00




**MAME SWIVEL BLOCK
(STAINLESS CAST SHEAVE WITH EYE END),
SS304 OR SS316**


A mm	B mm	C mm	SWL kgs	BL kgs
10.50	27.00	80.00	375	1500
12.00	32.00	121.00	425	1800
14.20	50.50	127.00	700	3500


**MAME SWIVEL BLOCK (NYLON SHEAVE)
SS304 OR SS316**


A mm	B mm	C mm	PIN
10.00	25.00	79.00	WELDED
11.00	32.00	95.00	WELDED
14.80	49.70	128.00	REMOVABLE SPLIT PIN


**MAME SWIVEL BLOCK (DOUBLE CAST SHEAVE)
SS304 OR SS316**

φ mm	A mm	B mm	C mm	D mm	E mm	F mm	SWL kgs	BL kgs
5.00	37.80	10.00	27.00	17.00	13.00	49.00	238	950
6.00	38.00	10.20	35.00	20.00	15.00	60.00	238	950
8.00	51.30	15.20	54.00	26.00	20.90	85.00	700	2800


**MAME SWIVEL BLOCK
(DOUBLE CAST SHEAVE WITH EYE END),
SS304 OR SS316**


A mm	B mm	C mm	D mm	E mm	SWL kgs	BL kgs
81.00	25.00	11.80	14.00	30.00	500	2000
95.00	32.00	11.80	14.00	35.60	575	2300
129.00	50.00	15.00	15.30	54.00	850	3400


**SEINE BLOCK (EYE TOP)
SS304 OR SS316**


A mm	B mm	C mm	D mm	E mm	SWL kgs	BL kgs
14.00	50.00	19.00	27.50	155.00	875	3500
15.00	75.00	24.00	40.50	222.00	1375	5500


**SEINE BLOCK (HOOK TOP)
SS304 OR SS316**

A mm	B mm	C mm	D mm	SWL kgs	BL kgs
15.00	75.00	270.00	75.00	575	2300



**RATED SNATCH BLOCK FOR ROPE
SS304 OR SS316**

A mm	B mm	C mm	D mm	E mm	F mm	TYPE R/V
111.60	49.90	24.00	21.60	12.50	20.50	ROPE
138.00	52.00	26.90	22.80	14.00	31.30	ROPE
174.60	53.00	29.00	34.90	18.80	31.00	ROPE



**QUICK LINK WIDE JAW
SS304 OR SS316**


Φ mm	A mm	B mm	C mm	D mm	E mm	SWL kgs	BL kgs
3.50	46.00	17.75	10.00	16.00	M5x0.90	200	1000
4.00	53.00	20.50	11.50	19.00	M6x1.00	250	1250
5.00	62.00	24.00	13.00	22.00	M7x1.00	400	2000
6.00	70.50	28.00	14.50	25.00	M9x1.25	580	2900
7.00	79.00	31.50	16.00	28.00	M10x1.25	800	4000
8.00	88.00	35.00	17.50	31.50	M11x1.25	980	4900
9.00	95.00	38.50	19.00	33.00	M12x1.25	1250	6250
10.00	105.50	42.00	20.50	36.00	M13x1.25	1600	8000
12.00	124.00	49.00	23.50	43.00	M15x1.50	2200	11000
14.00	142.00	56.00	26.50	49.00	M17x1.50	3100	15500
16.00	161.00	63.00	29.50	54.00	M19x1.50	4000	20000
18.00	176.50	70.50	32.50	62.00	M22x1.50	4900	24500

**DELTA SHAPE
QUICK LINK
SS304 OR SS316**

Φ mm	A mm	B mm	C mm	D mm	E mm	SWL kgs	BL kgs
3.50	31.00	36.00	5.00	12.00	M5x0.90	150	750
4.00	35.00	40.00	6.00	13.00	M6x1.00	200	1000
5.00	40.00	48.00	7.00	17.00	M7x1.00	325	1650
6.00	47.00	56.00	8.00	20.00	M9x1.25	450	2250
7.00	51.00	63.00	9.00	22.50	M10x1.25	625	3125
8.00	56.00	73.00	10.00	24.00	M11x1.25	770	3850
9.00	60.00	78.00	11.00	27.00	M12x1.25	980	4900
10.00	66.00	87.00	12.00	30.00	M13x1.25	1250	6250
12.00	75.00	104.00	15.00	33.00	M15x1.50	1750	8750
14.00	85.00	123.00	17.00	38.50	M17x1.50	2450	12250
16.00	93.00	138.00	19.00	45.00	M19x1.50	3150	15750
18.00	102.00	155.00	23.00	52.00	M22x1.50	4200	21000

**QUICK LINK
SS304 OR SS316**


Φ mm	A mm	B mm	C mm	D mm	E mm
3.00	35.00	16.50	6.00	12.00	M3.50x0.60
4.00	43.00	18.50	7.00	14.00	M4.50x0.75
5.00	52.00	22.50	8.50	18.00	M5.50x1.00
6.00	61.50	27.00	9.50	21.00	M6.50x1.00
8.00	77.00	35.50	11.00	25.00	M9.00x1.25
10.00	89.00	42.00	13.50	28.00	M10.50x1.25

**QUICK LINK
SS304 OR SS316**


Φ mm	A mm	B mm	C mm	D mm	E mm	SWL kgs	BL kgs
3.50	36.00	17.00	5.00	12.00	M5x1.90	220	1100
4.00	39.50	19.50	6.00	14.00	M6x1.00	280	1400
5.00	49.50	23.00	7.00	17.00	M7x1.00	450	2250
6.00	57.00	26.50	8.00	20.00	M9x1.25	650	3250
7.00	66.00	30.00	9.00	22.50	M10x1.25	900	4500
8.00	74.00	33.50	10.00	24.00	M11x1.25	1100	5500
9.00	80.00	37.00	11.00	27.00	M12x1.25	1400	7000
10.00	89.00	40.50	12.00	30.00	M13x1.25	1800	9000
12.00	104.50	47.50	14.00	34.00	M15x1.50	2500	12500
14.00	121.00	54.50	17.00	38.50	M17x1.50	3500	17500
16.00	140.00	61.50	19.00	45.00	M19x1.50	4500	22500
18.00	157.00	68.50	23.00	52.00	M22x1.50	5400	27000

**PEAR SHAPE QUICK LINK
SS304 OR SS316**


ϕ mm	A mm	B mm	C mm	D mm	E mm	SWL kgs	BL kgs
3.50	27.50	53.00	10.00	16.00	M5x0.90	130	650
4.00	32.00	61.00	11.50	19.00	M6x1.00	170	850
5.00	37.00	70.50	13.00	22.00	M7x1.00	270	1350
6.00	42.50	82.50	14.50	25.00	M9x1.25	400	2000
7.00	48.00	90.50	16.00	28.00	M10x1.25	550	2750
8.00	53.00	100.00	17.50	31.50	M11x1.25	660	3300
9.00	58.00	108.00	19.00	33.00	M12x1.25	840	4200
10.00	63.50	118.00	20.50	36.00	M13x1.25	1100	5500
12.00	76.00	144.00	23.50	43.00	M15x1.50	1500	7500
14.00	85.00	157.60	26.50	49.00	M17x1.50	2100	10500
16.00	95.50	176.50	29.50	54.00	M19x1.50	2700	13500


**SQUARE SHAPE QUICK LINK
SS304 OR SS316**


ϕ mm	A mm	B mm	C mm	D mm	E mm	SWL kgs	BL kgs
3.50	34.50	29.00	5.00	12.00	M5x0.90	150	750
4.00	39.50	33.00	5.50	14.00	M6x1.00	200	1000
5.00	47.50	38.00	6.50	17.00	M7x1.00	325	1625
6.00	55.00	43.00	7.50	20.00	M9x1.25	450	2250
7.00	63.50	48.00	8.50	22.50	M10x1.25	625	3125
8.00	71.00	53.00	10.00	24.00	M11x1.25	770	3850
9.00	78.00	58.00	11.00	27.00	M12x1.25	980	4900
10.00	88.50	63.00	12.00	30.00	M13x1.25	1250	6250
12.00	102.00	74.00	15.00	34.00	M15x1.50	1750	8750
14.00	117.00	85.00	17.00	38.50	M17x1.50	2100	10500
16.00	135.00	96.00	19.00	45.00	M19x1.50	2700	13500

**C-LINK
SS304 OR SS316**



ϕ mm	A mm	B mm
5.00	20.00	8.00
6.00	24.00	9.00
8.30	32.80	12.00
8.80	36.40	14.00
9.60	41.70	16.70
10.70	45.60	17.50
12.80	52.00	20.50
15.80	64.00	24.00
18.80	76.50	27.80
21.20	88.50	33.30
25.00	100.00	37.00

**DECK HINGE
(ANGLED SIDE MOUNT)
SS304 OR SS316**




A mm	B mm	C mm
4.20	16.20	55.60

**DECK HINGE
(ANGLED SIDE MOUNT
WITH REMOVABLE PIN)
SS304 OR SS316**



A mm	B mm	C mm
4.20	16.20	55.60

**DECK HINGE
(RAIL MOUNT)
SS304 OR SS316**



TUBE inch	A mm	B mm	C mm
7/8"	4.40	16.90	56.60

**DECK HINGE
(RAIL MOUNT
WITH REMOVABLE PIN)
SS304 OR SS316**




TUBE inch	A mm	B mm	C mm
7/8"	4.40	16.90	56.60

**90° DECK HINGE
SS304 OR SS316**



A mm	B mm	C mm
4.20	16.50	55.40

**DECK HINGE WITH
REMOVABLE PIN
SS304 OR SS316**

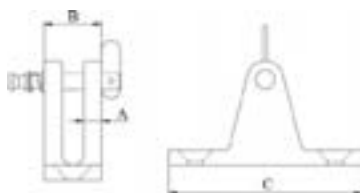


A mm	B mm	C mm
5.70	18.50	62.40

**DECK HINGE
SS304 OR SS316**



φ mm	A mm	B mm	C mm	D mm
6.10	49.50	22.00	4.70	17.20

**RAIL FITTING (TOP SLIDE CAP)
SS304 OR SS316**



TUBE inch	A mm	B mm	C mm
3/4"	20.30	25.00	45.00
7/8"	23.00	28.00	55.00
1"	26.30	33.50	57.00

**RAIL FITTING (TOP CAP)
SS304 OR SS316**




TUBE inch	A mm	B mm	C mm
3/4"	6.50	20.00	53.80
7/8"	7.80	23.20	59.00
1"	7.80	26.50	59.30

ROUND RING WELDED SS304 OR SS316




ϕ mm	A mm	SWL kgs	BL kgs
3.00	15.00	162	650
3.00	20.00	162	650
3.00	25.00	162	650
4.00	20.00	250	1000
4.00	25.00	250	1000
4.00	30.00	250	1000
4.00	35.00	250	1000
4.00	40.00	250	1000
5.00	20.00	500	2000
5.00	25.00	500	2000
5.00	30.00	500	2000
5.00	35.00	500	2000
5.00	40.00	500	2000
5.00	60.00	500	2000
5.00	65.00	500	2000
6.00	25.00	675	2700
6.00	30.00	675	2700
6.00	35.00	675	2700
6.00	40.00	675	2700
6.00	45.00	675	2700
6.00	50.00	675	2700
8.00	40.00	1250	5000
8.00	45.00	1250	5000
8.00	50.00	1250	5000
8.00	55.00	1250	5000
8.00	60.00	1250	5000
8.00	65.00	1250	5000
8.00	70.00	1250	5000
8.00	75.00	1250	5000
8.00	80.00	1250	5000
8.00	90.00	1250	5000
8.00	100.00	1250	5000
10.00	40.00	2125	8500
10.00	50.00	2125	8500
10.00	75.00	2125	8500
10.00	80.00	2125	8500
10.00	90.00	2125	8500
10.00	100.00	2125	8500
12.00	80.00	2500	10000
12.00	90.00	2500	10000
12.00	100.00	2500	10000
12.00	110.00	2500	10000
12.00	120.00	2500	10000

ROUND RING (CENTRE CROSS BAR) WELDED SS304 OR SS316



ϕ mm	A mm	SWL kgs	BL kgs
6.00	30.00	675	2700
6.00	40.00	675	2700
8.00	40.00	1250	5000
8.00	50.00	1250	5000
9.00	60.00	1550	6200
10.00	60.00	2125	8500
10.00	70.00	2125	8500
10.00	80.00	2125	8500
12.00	80.00	2500	10000


WIRE SUPPORT D-RING SS304 OR SS316

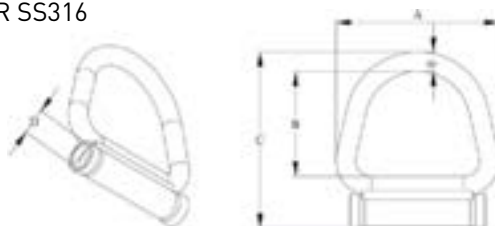


ϕ mm	A mm	B mm	C mm	D mm
8.00	66.00	43.00	71.00	10.00

DEE RING WELDED
SS304 OR SS316

φ mm	A mm	B mm	SWL kgs	BL kgs
3.00	22.00	26.00	150	600
4.00	22.00	37.00	200	800
4.00	25.00	30.00	200	800
5.00	22.00	26.00	250	1000
5.00	25.00	30.00	250	1000
5.00	35.00	40.00	250	1000
5.00	43.00	51.00	250	1000
5.00	51.00	60.00	250	1000
6.00	25.00	30.00	450	1800
6.00	30.00	35.00	450	1800
6.00	34.00	39.00	450	1800
6.00	43.00	51.00	450	1800
6.00	51.00	60.00	450	1800
8.00	43.00	51.00	700	2800
8.00	68.00	80.00	700	2800
10.00	47.00	50.00	1250	5000
10.00	77.00	80.00	1250	5000
10.00	97.00	100.00	1250	5000


DOUBLE LAYER
DEE RING WELDED
SS304 OR SS316

φ mm	A mm	B mm	C mm	SWL kgs	BL kgs
5.00	25.00	10.00	45.00	250	1000
6.00	25.00	10.00	45.00	450	1800
6.00	28.00	10.00	50.00	450	1800
8.00	25.00	10.00	45.00	700	2800
8.00	28.00	10.00	50.00	700	2800


TRIANGLE RING WELDED
SS304 OR SS316

φ mm	A mm	B mm	SWL kgs	BL kgs
4.00	60°	30.00	150	600
5.00	60°	20.00	225	900
5.00	60°	30.00	325	1300
5.00	60°	40.00	325	1300
5.00	60°	44.00	325	1300
6.00	60°	39.50	500	2000
6.00	60°	45.00	500	2000
6.00	60°	50.80	500	2000
8.00	60°	45.50	700	2800
8.00	60°	50.00	700	2800


LINCH PIN SS304 OR SS316




A mm	B mm	C mm	φ E mm	φ F mm
47.90	7.20	4.20	2.50	37.80
55.90	7.60	6.00	3.20	40.50
56.40	8.60	7.50	3.20	41.40
56.80	10.70	10.60	3.20	44.00

DEE RING THIMBLE
SS304 OR SS316


ϕ mm	A mm	B mm	C mm	D mm
35.00	66.50	59.00	19.00	8.00

D-SHACKLE LONG TYPE
SS304 OR SS316


ϕ mm	A mm	B mm	SWL kgs	BL kgs
4.00	7.50	31.30	175	700
5.00	9.50	37.00	312	1250
6.00	13.50	45.30	450	1800
8.00	16.50	60.00	687	2750
10.00	20.80	75.50	821	3250
12.00	25.00	90.00	1600	6400

STANDARD D-SHACKLE
SS304 OR SS316

ϕ mm	A mm	B mm	SWL kgs	BL kgs
4.00	8.30	15.00	138	550
5.00	11.30	17.00	250	1000
6.00	12.30	21.00	425	1700
7.00	14.00	24.50	500	2000
8.00	17.00	28.60	625	2500
9.00	18.50	32.30	800	3200
10.00	20.00	35.00	1025	4100
12.00	25.00	45.50	1350	5400
13.00	27.50	50.00	1525	6100
14.00	28.00	49.00	1625	6500
16.00	32.00	56.00	2200	8800
19.00	38.50	67.00	2500	10000


ANCHOR/BOW SHACKLE
SS304 OR SS316

ϕ mm	A mm	B mm	C mm	SWL kgs	BL kgs
4.00	8.00	20.00	13.00	138	550
5.00	10.80	23.00	17.00	300	1200
6.00	13.00	31.00	21.00	425	1700
8.00	17.50	36.50	28.00	625	2500
10.00	21.50	44.00	35.50	1075	4300
12.00	27.00	52.50	41.00	1550	6200
13.00	25.80	60.00	42.00	1585	6340
14.00	28.00	57.50	46.70	1625	6500
16.00	32.00	73.50	54.00	1750	7000
19.00	35.60	85.00	64.40	3500	14000
22.00	41.00	94.00	74.00	4250	17000
25.00	47.00	105.50	84.00	5000	20000
28.00	53.00	116.50	94.50	5750	23000

D-SHACKLE
(WITH SLOT SINK PIN)
SS304 OR SS316


ϕ mm	A mm	B mm	SWL kgs	BL kgs
4.00	8.00	15.00	138	550
5.00	10.50	17.70	250	1000
6.00	13.00	21.00	425	1700
8.00	17.50	28.90	500	2000
10.00	20.00	35.00	625	2500
12.00	25.00	40.00	800	3200

D-SHACKLE
(WITH HEXAGONAL
SOCKET SINK PIN)
SS304 OR SS316




A mm	B mm	C mm	SWL kgs	BL kgs
5.00	10.00	17.50	250	1000
6.00	13.00	20.70	425	1700
8.00	16.80	27.80	625	2500
10.00	20.00	35.00	1025	4100
12.00	24.60	40.50	1350	5400
13.00	27.00	45.80	1525	6100
14.00	28.90	49.00	1625	6500
16.00	32.00	56.00	2200	8800
19.00	38.00	64.00	4000	16000
22.00	39.00	74.00	4750	19000

D-SHACKLE
WIDE TYPE
SS304 OR SS316




φ mm	A mm	B mm	SWL kgs	BL kgs
5.00	25.50	20.40	188	750
6.00	24.00	33.50	338	1350
8.00	28.70	31.00	625	2500
10.00	41.50	55.00	834	3350
12.00	47.60	66.00	1000	4000

D-SHACKLE
(WITH CAPTIVE PIN)
SS304 OR SS316




A mm	B mm	L mm	SWL kgs	BL kgs
4.00	9.00	14.80	137	550
5.00	10.40	17.80	250	1000
6.00	13.00	22.50	425	1700
7.00	14.70	24.50	500	2000
8.00	17.30	28.60	625	2500
9.00	18.90	32.00	800	3200
10.00	22.60	35.60	1025	4100
12.00	25.00	42.40	1350	5400
14.00	27.00	49.50	1625	6500
16.00	32.00	48.70	2200	8800

D-SHACKLE SEMI ROUND TYPE
SS304 OR SS316




A mm	B mm	C mm	D mm	SWL kgs	BL kgs
12.00	12.00	18.50	5.00	237	950
13.00	13.00	22.00	6.00	375	1500
18.00	16.50	27.00	8.00	650	2600

D-SHACKLE SEMI ROUND TYPE
(WITH SLOT SCREW PIN)
SS304 OR SS316




A mm	B mm	C mm	D mm	SWL kgs	BL kgs
12.00	12.00	18.50	5.00	237	950
13.00	13.00	22.00	6.00	375	1500
18.00	16.50	27.00	8.00	650	2600

STRAP-SHACKLE WITH SCREW PIN SS304 OR SS316




ϕ mm	A mm	B mm	C mm	SWL kgs	BL kgs
4.00	9.50	18.00	1.90	70	220
5.00	11.80	21.30	2.00	90	300
6.00	15.00	26.50	3.20	120	500
8.00	21.60	45.00	3.90	200	900

HALYARD SHACKLE (WITH CROSS BAR & LOCKING PIN) SS304 OR SS316




ϕ mm	A mm	B mm	SWL kgs	BL kgs
5.00	14.00	38.50	300	1200
6.00	16.50	43.50	400	1600
8.00	22.00	61.00	700	2800

HEAD BOARD SHACKLE CROSS BAR AND LOCKING PIN SS304 OR SS316




A mm	B mm	C mm	D mm	E mm	F mm	G mm	SWL kgs	BL kgs
25.00	11.80	46.50	6.00	11.70	49.00	M8	475	1900
43.50	15.00	63.00	8.00	15.40	49.00	M10	925	3700
42.50	19.50	77.30	10.00	18.70	49.00	M12	1300	5200
49.00	22.00	93.00	12.00	22.50	49.00	M14	1625	6500

HALYARD SHACKLE (WITH LOCKING PIN) SS304 OR SS316



ϕ mm	A mm	B mm	SWL kgs	BL kgs
5.00	14.00	38.50	300	1200
6.00	16.50	43.50	400	1600
8.00	22.00	61.00	700	2800

TWIST SHACKLE SS304 OR SS316




ϕ mm	A mm	B mm	SWL kgs	BL kgs
4.00	7.50	22.00	167	665
5.00	10.50	24.50	275	1100
6.00	12.00	33.50	400	1600
8.00	16.00	41.00	700	2800
10.00	20.00	46.00	1150	4600
12.00	26.70	60.00	1500	6000

SHACKLE KEY SS304 OR SS316



A mm	B mm	C mm
5.00	2.50	100.00


SHACKLE KEY-CAST SS304 OR SS316




A mm	B mm	C mm
4.80	85.50	46.00

SWIVEL EYE AND EYE
SS304 OR SS316


ϕ mm	A mm	B mm	C mm	SWL kgs	BL kgs
4.00	11.50	12.20	50.00	113	450
5.00	13.00	14.00	60.00	163	650
6.00	15.00	15.50	66.00	300	1200
8.00	19.00	21.50	90.00	475	1900
9.00	20.50	24.00	100.00	750	3000
10.00	23.50	26.50	112.00	875	3500
13.00	33.00	33.00	148.00	1250	5000
16.00	38.00	44.00	184.00	2125	8500
19.00	40.50	50.00	223.00	2500	10000
22.00	48.50	58.50	253.00	2875	11500
25.00	64.80	73.00	290.00	3250	13000

SWIVEL EYE AND JAW
SS304 OR SS316

ϕ mm	A mm	B mm	C mm	SWL kgs	BL kgs
6.00	11.80	13.00	65.00	300	1200
8.00	15.50	16.50	88.00	475	1900
10.00	20.50	19.00	111.80	875	3500
13.00	25.50	26.00	146.50	1250	5000
16.00	36.00	31.60	183.00	2125	8500
19.00	40.00	34.50	219.00	2500	10000

SWIVEL JAW AND JAW
SS304 OR SS316

ϕ mm	A mm	B mm	C mm	SWL kgs	BL kgs
6.00	12.00	12.00	64.40	300	1200
8.00	15.50	16.00	87.00	475	1900
10.00	20.50	18.50	111.00	875	3500
13.00	25.50	26.00	143.50	1250	5000
16.00	36.00	34.00	182.00	2125	8500
19.00	40.00	35.00	213.00	2500	10000


SNAP SHACKLE
FIXED EYE
SS304 OR SS316

A mm	B mm	C mm	D mm	SWL kgs	BL kgs
22.50	32.00	10.00	5.60	100	400
35.00	55.00	12.50	10.00	275	1100
45.00	70.00	20.00	15.00	500	2000
60.00	96.00	26.50	16.50	875	3500

SWIVEL EYE BOLT SNAP
SS304 OR SS316

A mm	B mm	C mm	SWL kgs	BL kgs
10.50	64.50	7.00	45	180
12.50	88.00	12.80	62	250
15.80	90.00	12.00	162	650
19.00	93.00	11.30	162	650
25.40	100.00	12.00	150	600
28.60	120.00	16.00	150	600
31.75	127.50	17.50	125	500

SNAP SHACKLE WITH CAST SWIVEL JAW SS304 OR SS316




A mm	B mm	C mm	D mm	SWL kgs	BL kgs
33.00	11.00	12.00	74.00	275	1100
42.00	16.00	16.00	96.50	500	2000
58.00	20.00	22.00	127.00	875	3500

SNAP SHACKLE WITH FORGED SWIVEL JAW SS304 OR SS316




A mm	B mm	C mm	D mm	SWL kgs	BL kgs
33.00	14.50	12.00	66.50	275	1100
42.00	13.50	16.00	86.50	500	2000
58.00	24.00	22.00	122.00	875	3500

SNAP SHACKLE WITH CAST SWIVEL EYE SS304 OR SS316




A mm	B mm	C mm	D mm	SWL kgs	BL kgs
33.00	13.00	12.00	71.00	275	1100
42.00	15.00	16.00	86.00	500	2000
58.00	20.60	22.00	122.00	875	3500

DOUBLE BOLT SNAP SS304 OR SS316




A mm	B mm	C mm	D mm	SWL kgs	BL kgs
89.30	8.90	9.50	8.50	45	180
105.00	9.20	10.20	9.00	88	350
121.80	9.50	12.50	12.00	90	360

TRIGGER SNAP (SWIVEL END) SS304 OR SS316




A mm	B mm	C mm	SWL kgs	BL kgs
10.50	13.00	65.00	50	200
10.50	16.00	65.00	50	200

SWIVEL EYE SNAP SS304 OR SS316



A mm	B mm	C mm	SWL kgs	BL kgs
6.60	15.30	67.30	38	150
9.80	21.50	87.50	43	170
11.50	21.90	101.00	63	250
12.00	22.30	118.50	85	340

RIGID EYE SNAP SS304 OR SS316



φ mm	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
3.80	55.80	23.50	12.20	8.80	40	160
4.50	72.80	29.60	16.70	8.80	50	200
6.10	86.50	37.00	19.40	12.00	75	300
6.60	100.20	40.80	19.30	12.50	112	450

BULL SNAP (SWIVEL END)
 SS304 OR SS316


A mm	B mm	C mm	D mm	E mm	F mm
16.50	37.00	28.00	22.00	6.00	102.00

DOUBLE LOCKING SAFETY HOOK
 SS304 OR SS316



A mm	B mm	C mm	D mm	SWL mm	BL mm
62.00	20.00	19.00	106.50	388	1550

RIGID EYE SNAP HOOK WITH SAFETY LATCH
 SS304 OR SS316


A mm	B mm	C mm	D mm	SWL mm	BL mm
18.50	33.70	100.50	24.00	188	750
28.00	45.60	116.80	23.00	250	1000

LIFTING EYE NUT SS304 OR SS316



A mm	B mm	C mm	D mm	E mm	F mm	SWL kgs	BL kgs
M8	26.40	12.00	13.00	36.80	5.70	500	2000

DOUBLE EYE WITH INTERNAL THREAD
 SS304 OR SS316


A mm	B mm	C mm	D mm	E mm	F mm	G mm
62.00	26.40	12.00	13.00	36.30	5.70	M8

EYE BOLT
 SS304 OR SS316


A mm	B mm	L mm	M mm	SWL kgs	BL kgs
15.70	18.50	41.00	M6	325	1300
20.30	20.60	49.50	M8	550	2000
25.30	26.00	62.00	M10	650	2600
30.00	33.00	74.00	M12	975	3900
35.00	40.00	91.50	M16	1750	7000
40.00	44.00	103.00	M20	2500	10000
50.00	55.00	125.20	M24	3000	12000
59.50	73.20	154.00	M30	4500	18000

LIFTING EYE NUT (SUS TYPE)
 SS304 OR SS316



φ mm	A mm	B mm	C mm	SWL kgs	BL kgs
5.00	16.00	31.00	M6	60	240
5.80	20.00	38.50	M8	80	320
7.60	25.00	49.00	M10	150	600
8.80	30.00	60.00	M12	220	880
12.00	35.00	70.50	M16	450	1800
15.80	40.00	85.50	M20	630	2520
19.00	50.50	102.60	M24	950	3800

EYE BOLT (SUS TYPE) SS304 OR SS316




A mm	B mm	C mm	SWL kgs	BL kgs
M6	16.80	37.40	60	240
M8	20.60	47.00	80	320
M10	25.60	60.70	150	600
M12	29.70	72.30	220	880
M16	35.00	86.00	450	1800
M20	40.50	103.00	630	2520
M24	45.50	129.00	950	3800

OBLONG PAD EYE (WITH RING) SS304 OR SS316



A mm	B mm	C mm	D mm	E mm	F mm
54.00	5.00	38.00	16.00	5.00	30.50
65.00	5.20	46.00	19.00	6.00	41.30
81.00	6.30	55.00	25.70	8.00	51.00

OBLONG PAD EYE SS304 OR SS316




φ mm	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
5.00	5.00	16.00	38.00	54.00	175	700
6.00	5.50	19.00	46.00	65.00	250	1000
8.00	6.50	25.80	55.50	81.00	400	1600
9.00	8.20	31.80	62.00	100.00	425	1700

OBLONG PAD EYE (OPEN) SS304 OR SS316




A mm	B mm	C mm	D mm	E mm	SWL kgs	BL kgs
54.00	5.00	38.00	8.00	5.0	50	200
65.00	6.00	46.00	12.00	5.5	55	220
81.00	8.00	55.00	13.00	6.5	62	250
100.00	9.00	62.00	16.00	8.0	70	280

SQUARE PAD EYE SS304 OR SS316




φ mm	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
5.00	2.50	30.00	35.00	4.20	175	700
6.00	2.50	35.00	40.00	5.20	250	1000
8.00	2.90	40.00	50.00	5.50	400	1600
10.00	3.30	47.80	60.80	5.50	500	2000

SQUARE PAD EYE WITH RING SS304 OR SS316




φ mm	A mm	B mm	C mm	D mm	E mm	SWL kgs	BL kgs
5.00	4.10	2.40	30.60	35.00	30.00	175	700
6.00	5.30	2.50	40.80	40.00	35.00	250	1000
8.00	5.60	3.50	45.50	50.00	40.00	400	1600


DIAMOND PAD EYE WITH RING SS304 OR SS316




φ mm	A mm	B mm	C mm	D mm	E mm	SWL kgs	BL kgs
5.00	22.50	4.00	36.50	5.00	59.00	175	700
6.00	26.50	4.00	39.50	6.00	64.00	250	1000
8.00	33.00	5.00	50.00	8.00	80.00	400	1600

DIAMOND PAD EYE
SS304 OR SS316

ϕ mm	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
5.00	22.50	4.00	36.50	58.80	175	700
6.00	27.00	4.40	40.00	63.90	250	1000
8.00	33.00	5.50	48.80	79.90	400	1600

SQUARE PAD SWIVEL EYE (WITH RING)
SS304 OR SS316

A mm	B mm	C mm	D mm	SWL kgs	BL kgs
34.00	30.00	30.80	5.00	112	450
40.00	34.00	40.00	6.00	175	700
50.00	40.00	50.50	8.00	212	850

SQUARE PAD SWIVEL EYE,
SS304 OR SS316

ϕ mm	A mm	B mm	C mm	SWL kgs	BL kgs
5.00	30.00	34.00	15.80	113	450
6.00	34.00	40.00	18.50	175	700
8.00	40.00	50.00	18.90	213	850


ROUND PAD EYE WITH RING
SS304 OR SS316

A mm	B mm	C mm	D mm	E mm	F mm
5.00	20.90	33.00	4.50	5.00	31.00
6.00	25.30	39.80	4.50	6.00	41.00
8.00	32.00	49.80	5.50	8.00	51.00

ROUND PAD EYE SS304 OR SS316



ϕ mm	A mm	B mm	C mm	SWL kgs	BL kgs
5.00	20.90	33.00	4.20	175	700
6.00	26.00	40.00	4.50	250	1000
8.00	32.50	57.30	5.50	400	1600


ROUND PAD EYE BOLT (WITH RING)
SS304 OR SS316

A mm	B mm	C mm	D mm	E mm	SWL kgs	BL kgs
5.00	31.80	5.00	30.70	6.00	175	700
6.00	39.80	6.00	40.80	8.00	250	1000
8.00	50.00	8.00	50.80	10.00	400	1600

ROUND PAD EYE (OPEN)
SS304 OR SS316


ϕ mm	A mm	B mm	C mm	SWL kgs	BL kgs
5.00	33.00	8.50	4.50	50	200
6.00	40.00	12.80	4.50	55	220
8.00	50.00	14.00	5.50	63	250

ROUND PAD EYE BOLT SS304 OR SS316



φ mm	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
5.00	31.80	20.80	M6	42	100	400
6.00	39.80	23.00	M8	49	125	500
8.00	49.60	24.00	M10	56	250	1000

U-BOLT WITH WASHER AND NUT SS304 OR SS316




A mm	B mm	C mm	D mm	E mm	M mm
45.00	12.00	30.00	30.00	60.00	M4
50.00	13.00	39.00	35.00	80.00	M5
50.00	15.00	40.00	35.00	90.00	M6
50.00	15.00	40.00	35.00	80.00	M8
50.00	15.00	50.00	35.00	100.00	M8
70.00	20.00	55.00	50.00	91.00	M10
70.60	20.00	55.00	50.00	130.00	M10
83.00	23.00	73.60	58.60	150.00	M12

V-BOLT WITH WASHER AND NUT SS304 OR SS316




A mm	B mm	C mm	D mm	M mm
2.00	79.80	30.00	35.00	M6
2.00	101.00	40.00	35.00	M6
2.00	81.00	29.00	41.00	M8
2.00	100.50	40.00	41.00	M8
2.00	100.50	40.00	49.00	M10
1.80	121.00	50.00	49.00	M10

U-BOLT WITH WASHER AND NUT SS304 OR SS316



A mm	B mm	C mm	L mm	L1 mm	L2 mm	L3 MM
35.50	M8	10.00	65.00	39.50	3.00	23.30
35.50	M8	10.00	76.00	39.60	5.00	32.40
35.50	M8	10.00	90.00	39.00	4.00	47.00
35.00	M8	10.00	115.00	39.00	29.00	47.00
35.50	M8	10.00	140.00	40.00	54.00	47.00
35.50	M8	10.00	165.00	45.00	73.00	47.00


U BOLTS WITH NUT AND FLAT WASHERS

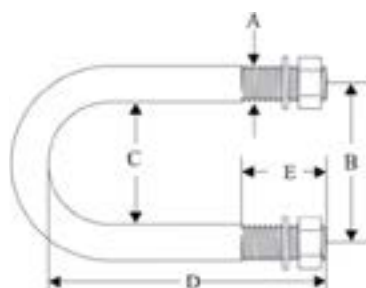

A mm	B mm	C mm	D mm	E mm
1/4" unc	27.00	21.00	35.00	15.00
1/4" unc	29.00	23.00	40.50	16.00
1/4" unc	33.00	27.00	46.00	16.00
1/4" unc	39.00	33.00	51.50	25.00
1/4" unc	41.00	35.00	60.00	28.00
1/4" unc	46.00	40.00	65.00	28.00
1/4" unc	51.00	45.00	71.00	30.00
1/4" unc	58.00	52.00	82.00	30.00
1/4" unc	68.00	62.00	88.00	35.00
5/16" unc	86.00	78.00	107.00	40.00
5/16" unc	100.00	92.00	134.00	45.00
3/8" unc	126.00	116.00	169.00	45.00
1/2" unc	190.00	176.00	219.00	50.00

BUTT HINGE- STANDARD 'ALL STAINLESS'
COMPLETE WITH SCREWS- SOLD PER PAIR

Size mm	L mm	W mm	T mm	Screw Size
2.00	50.00	38.00	1.50	6#
2.50	63.00	40.00	1.50	6#
3.00	76.00	48.00	1.50	6#
4.00	101.00	70.00	1.80	8#

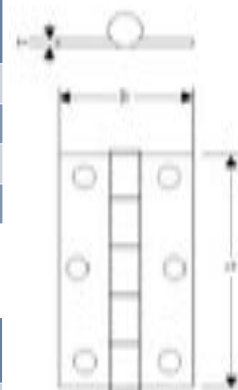

BUTT HINGE WITH NYLON BEARINGS
COMPLETE WITH SCREWS- SOLD PER PAIR

Size mm	L mm	W mm	T mm	Screw Size
2.00	50.00	38.00	1.50	6#
2.50	63.00	40.00	1.50	6#
3.00	76.00	48.00	1.50	6#
4.00	101.00	70.00	1.80	8#

BUTT HINGE WITH NYLON BEARINGS- COMMERCIAL QUALITY
COMPLETE WITH SCREWS- SOLD PER PAIR

Size mm	L mm	W mm	T mm	Screw Size
4x3x2	101.00	76.00	2.00	8#
4x4x2	101.00	101.00	2.00	8#

BUTT HINGE WITH STAINLESS BEARINGS- COMMERCIAL QUALITY
COMPLETE WITH SCREWS- SOLD PER PAIR

Size mm	L mm	W mm	T mm	Screw Size
4x4x2	101.00	101.00	2.00	8#
4x4x3	101.00	101.00	3.00	8#
5x4x3	127.00	101.00	3.00	8#


PIANO HINGE
SOLD INDIVIDUALLY



Width Open mm	Width Closed mm	Length mm	Pin Diameter mm	T mm
M25 (Undrilled)	16.00	1800	3.20	1.20
M32 (Undrilled)	19.00	1800	3.20	1.20
M32 (Drilled)	19.00	1800	3.20	1.20
M38 (Undrilled)	22.00	1800	3.20	1.20
M50 (Undrilled)	29.00	1800	4.50	1.50


STAINLESS STEEL HINGE, SS304 OR SS316
SOLD INDIVIDUALLY

A mm	B mm	C mm	D mm
4.00	38.00	5.20	75.30
4.20	38.00	5.20	103.80




STAINLESS STEEL HINGE, SS304 OR SS316
SOLD INDIVIDUALLY

A mm	B mm	C mm
38.00	5.30	57.00
38.00	5.30	71.00




COVER LATCH CAST SS304 OR SS316

A mm	B mm	C mm	L mm
37.00	37.90	49.00	75.00



BOW ROLLER SS304 OR SS316

A mm	B mm	C mm	D mm	E mm	F mm
577.28	150.50	66.00	77.00	3.50	9.00
432.43	160.50	65.80	77.00	3.50	9.00



L-SHAPE PLATE SS304 OR SS316

A mm	B mm	C mm	D mm	E mm	F mm
90L-150	30.00	5.00	90.00	5.00	10.00
90L-200	30.00	5.00	90.00	5.00	10.00
90L-250	30.00	5.00	90.00	5.00	10.00
90L-300	30.00	5.00	90.00	5.00	10.00




TOGGLE LATCH ADJUSTABLE AND LOCKABLE SS304


Size	L mm	A mm	B mm	C mm	D mm	F mm
JG1	78-87	24.00	33.00	18.00	14.00	24.00
JG2	110-120	22.00	30.00	25.00	20.00	35.00

TOGGLE LATCH ADJUSTABLE AND LOCKABLE
SS304


Size	L mm	A mm	B mm	C mm	D mm	F mm
JG1	78-87	24.00	33.00	18.00	14.00	24.00
JG2	110-120	22.00	30.00	25.00	20.00	35.00

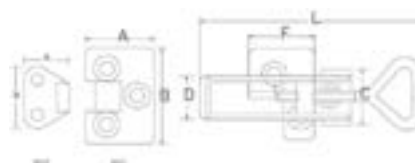CABIN HOOK
SS304 OR SS316


A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm
17.50	9.00	7.90	6.50	25.80	20.40	37.90	2.80	79.30
17.50	9.00	7.90	6.50	25.80	20.40	37.90	2.80	103.00

STRAP BUCKLE
SS304 OR SS316

A mm	B mm	C mm	D mm	E mm
50.30	11.30	25.50	25.50	30.00

RATCHET BUCKLE
SS304 OR SS316

A mm	B mm	C mm
16.20	32.50	53.00




STRAP BUCKLE
SS304 OR SS316

A mm	B mm	C mm	D mm	E mm
50.30	11.30	25.50	25.50	30.00




RATCHET BUCKLE
SS304 OR SS316

A mm	B mm	C mm
16.20	32.50	53.00




FLUSH PULL
SS316

A mm	B mm	C mm	D mm
62.00	44.50	4.50	7.80





FLUSH PULL
SS316

A mm	B mm	C mm	D mm
78.00	58.00	4.50	7.80



STAY-PUT (HORIZONTAL AND VERTICAL)
SS316

A mm	B mm	C mm	D mm	E mm	F mm	ORIENTATION
16.0	35.0	5.5	9.5	9.0	19.0	VERTICAL
16.0	35.0	5.5	9.5	9.0	16.0	VERTICAL
16.0	35.0	5.5	9.5	9.0	19.0	HORIZONTAL
16.0	35.0	5.5	9.5	9.0	16.0	HORIZONTAL




FOLDING EYE PAD
SS316

A mm	B mm	C mm	D mm	E mm	F mm
6.0	45.0	29.0	39.0	3.3	17.5




WING NUT (LONG TYPE) SS304 OR SS316

A mm	B mm	C mm	D mm	M mm
14.60	10.90	45.40	23.70	M8
19.20	11.80	61.60	29.50	M10
22.20	13.80	72.00	34.60	M12
27.20	15.80	86.50	40.00	M16
35.00	19.80	108.50	49.00	M20
39.00	21.80	119.50	54.60	M22

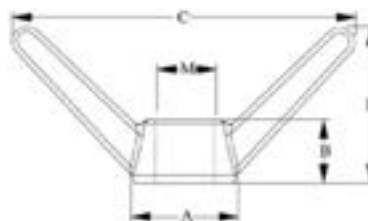STAINLESS STEEL BALL (INTERNAL THREAD)
SS304 OR SS316

ϕ A mm	B mm	C mm
15.00	12.50	M5
20.30	15.20	M6

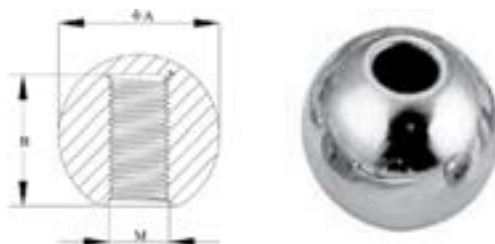

STAINLESS STEEL BALL SS304 OR SS316

A mm	B mm	C mm
5.30	15.00	12.70
6.00	20.00	17.40




ALUMINIUM CARABINER, CURVED GATE 100

A mm	B mm	C mm	BL kgs
100.00	58.50	25.00	2200



ALUMINIUM CARABINER 111

A mm	B mm	C mm	BL kgs
112.90	62.50	22.00	2400



ALUMINIUM CARABINER, WITH LOCKING NUT

A mm	B mm	C mm	BL kgs
112.90	62.50	19.00	2400



ALUMINIUM CARABINER, WITH LOCKING NUT 111

A mm	B mm	C mm	BL kgs
111.50	66.80	19.00	2600



ALUMINIUM CARABINER 111

A mm	B mm	C mm	BL kgs
111.50	66.80	21.50	2600



HOSE CLAMPS - ALL STAINLESS STEEL




Universal Size	Diameter Range	Band Width
000	8-16	9
00	12-20	9
0	16-25	12
1	25-40	12
1A	20-32	12
1X	30-45	12
2A	32-50	12
2	40-60	12
3	50-70	12
4	70-90	12
5	90-100	12
6	110-130	12
8	150-170	12

BLIND RIVETS - ALL STAINLESS
(RIVET & MANDREL)
OPEN TYPE


Size mm	Rivet Diameter	Grip Range	Drill Size	Pkt Qty
4-2	1/8	up to 1/8	No 30 (3.3mm)	1000
4-3	1/8	1/8-3/16	No 30 (3.3mm)	1000
4-4	1/8	3/16-1/4	No 30 (3.3mm)	1000
4-6	1/8	1/4-3/8	No 30 (3.3mm)	1000
4-8	1/8	3/8-1/2	No 30 (3.3mm)	1000
5-2	5/32	up to 1/8	No 20 (4.1mm)	1000
5-4	5/32	1/8-1/4	No 20 (4.1mm)	1000
5-6	5/32	1/4-3/8	No 20 (4.1mm)	500
6-2	3/16	up to 1/8	No 11 (4.8mm)	500
6-4	3/16	1/8-1/4	No 11 (4.8mm)	500
6-6	3/16	1/4-3/8	No 11 (4.8mm)	500
6-8	3/16	3/8-1/2	No 11 (4.8mm)	500
6-10	3/16	1/2-5/8	No 11 (4.8mm)	500
6-12	3/16	5/8-3/4	No 11 (4.8mm)	250

SCREW EYES



Size mm	φ mm	A mm	B mm	C mm	D mm	Std Pack
20.00	1.85	20.5	5.00	10.00	8.00	50
23.00	2.15	23.00	6.00	12.00	10.00	50
25.00	2.45	25.00	7.00	12.00	10.00	50
29.00	2.80	29.00	9.00	13.00	11.00	50
34.00	3.30	34.00	10.00	18.00	15.00	50
42.00	3.90	42.00	12.00	20.00	15.00	50

CUP HOOK- SHOULDERED



Size mm	φ mm	A mm	B mm	C mm	Std Pack
16.00	2.20	16.00	5.00	10.00	50
20.00	2.40	20.00	7.00	12.00	50
25.00	2.80	25.00	10.00	14.00	50
28.00	3.20	28.00	10.00	15.00	50
32.00	3.50	32.00	13.00	17.00	50

EYE LAG SCREW WITH ROUND RING
SS304 OR SS316

D	D1	D2	L1	C	E	T	R	d	d1
8*3.5	18.00	8.40	60.00	40.00	7.6~8	9.00	5.00	7.00	50.00
4*1.8	8.00	4.20	45.00	30.00	3.6~4	5.00	3.00	4.00	25.00
5*2.2	10.00	5.20	50.00	35.00	4.6~5	6.00	3.50	5.00	30.00
5*2.2	10.00	5.20	60.00	40.00	4.5~5	6.00	3.50	5.00	30.00
6*2.6	14.00	6.30	40.00	30.00	5.6~6	7.00	4.00	6.00	30.00
6*2.6	14.00	6.30	50.00	35.00	5.6~6	7.00	4.00	6.00	30.00
6*2.6	14.00	6.30	55.00	40.00	5.6~6	7.00	4.00	6.00	30.00
6*2.6	14.00	6.30	60.00	40.00	5.6~6	7.00	4.00	6.00	30.00
8*3.5	18.00	8.40	60.00	40.00	7.6~8	9.00	5.00	8.00	50.00
8*3.5	18.00	8.40	75.00	50.00	7.6~8	9.00	5.00	8.00	50.00
8*3.5	18.00	8.40	80.00	55.00	7.6~8	9.00	5.00	8.00	50.00
8*3.5	18.00	8.40	100.00	65.00	7.6~8	9.00	5.00	8.00	50.00
10*4.5	20.00	10.20	75.00	50.00	9.6~10	11.00	6.00	10.00	60.00
10*4.5	20.00	10.20	80.00	55.00	9.6~10	11.00	6.00	10.00	60.00
10*4.5	20.00	10.20	85.00	60.00	9.6~10	11.00	6.00	10.00	60.00
10*4.5	20.00	10.20	100.00	65.00	9.6~10	11.00	6.00	10.00	60.00
10*4.5	20.00	10.20	120.00	80.00	9.6~10	11.00	6.00	10.00	60.00
12*5.0	24.00	12.10	100.00	65.00	11.6~12	13.00	8.00	12.00	75.00
12*5.0	24.00	12.10	120.00	80.00	11.6~12	13.00	8.00	12.00	75.00

RING BOLT WITH
WASHER & NUT
SS304 OR SS316

φ mm	A mm	B mm	C mm	D mm	SWL kgs	BL kgs
5.00	30.00	40.00	60.00	M5	200	800
6.00	35.00	50.00	75.00	M6	250	1000
6.00	35.00	60.00	90.00	M6	250	1000
8.00	45.00	50.00	85.00	M8	450	1800
8.00	45.00	60.00	100.00	M8	450	1800
9.00	50.00	50.00	100.00	M10	600	2400
9.00	50.00	75.00	120.00	M10	600	2400
10.00	50.00	50.00	100.00	M10	600	2400
12.00	60.00	70.00	120.00	M12	1000	4000
12.00	60.00	100.00	150.00	M12	1000	4000
12.00	60.00	120.00	180.00	M12	1000	4000